Tactical



Long Gun Light Kits

Adjustable Beam Metal NSP-410 NSP-420 NSP-430

Nightstick products are designed and manufactured by Bayco Products, Inc., is a global brand of professional lighting products including flashlights, headlamps and Intrinsically Safe lighting solutions that exceed the industry standards in performance, quality, user-safety and value. Since 1984, Bayco Products, Inc. has been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized worldwide as high-performance, high-quality, high-value lighting solutions across virtually every industry. Headquartered in North Texas, Bayco Products' 110,000sf facility is the international headquarters for R&D, engineering, marketing, sales and













UV Lights

Tactical Dual-Light Flashlights



Rechargeable Scene / Area Lights



Duty / Personal-Size







NSR-2168B

NSR-2168R



Full-Size




Headlamps





Safety Lights

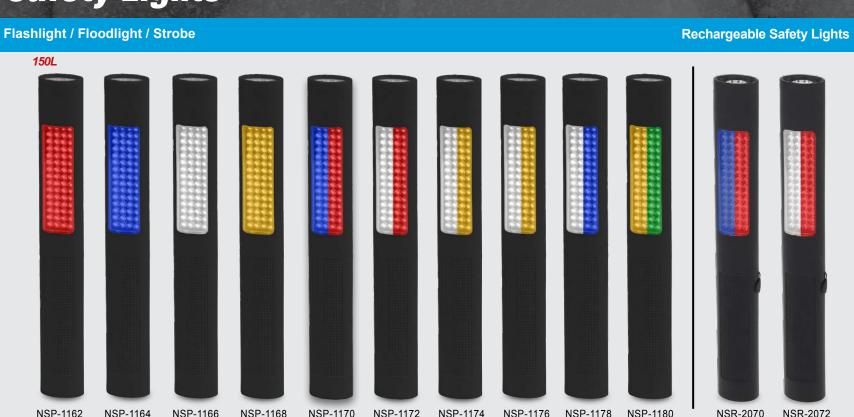

Traffic Wands



1,000 / 500

NSR-1514C

4/8

288 oz (3,629 g)

CE

ALL DESCRIPTION OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN	Number								Aire	Material craft-grade	Source	4.25 in	1 in	Diameter 0.88 in	3.3 c		Year	
	NSP-410		11	15	1	72 m	1,324	Waterp		luminum	1 AA	(108 mm)	(26 mm)	(22 mm)	(94)		mited	CE
	NSP-420	Yes	275/1	15/45	2/5.5/24	133 m	4,445	Waterp		craft-grade luminum	3 AAA	4.5 in (114 mm)	1.3 in (33 mm)	1 in (25 mm)	4.6 d (131		Year mited	CE
	NSP-430		27	75	1.5	109 m	3,003	Waterp	proof Airo	craft-grade	2 AA	5.8 in (147 mm)	1 in (26 mm)	0.88 in (22 mm)	4.8 c (140	oz 1 a) Li	Year	CE
	•												(20)	(22)	(1.0	9/		
Outy/Personal-Size	e Part	Dual-	xtreme	Multi- Func-	Lumen	Run-time	e Bean Distan			ater Case	Material Po		ngth He		ndle	Weight	Warranty	Certific
0 !	Number NSR-9514XL	Light	Lumens	tion Yes	850 / 200	/50 6.5 / 9 / 5	325 / 16	66 / 26,	280 / Wata		ss-filled Rech	Jo 0.3	Dian 1.6	in 1.:	meter 2 in	10.1 oz		CE
	•		103	103			85 m	24	100 /	Po	olymer Lithiu	m-ion (226	mm) (41		mm)	(286 g)		
•	NSR-9514Y			Yes	350 / 200	/ 55 4.25 / 8.5 32.5	118 n	1 6,	200		lylon at blymer Lithiu	m-ion (226	mm) (41	mm) (30	2 in mm)	(286 g)	Lifetime	CE
	NSR-9614XL		Yes	Yes	850 / 200 650 / 30		. 65 11	6,88	280 / 0 / 450 Wate	Alu		nle (226	9 in 1.6 mm) (41	mm) (30	2 in mm)	12.8 oz (363 g)	Lifetime	CI
0.0	NSR-9920XL	Yes	Yes	Yes	150 / 20 / 400 650 / 30	00 / 18.75 / 7.25 / 7	115 n	11,	302 / Wate 028	rproof N Po	lylon at olymer Lithiu	nle m-ion (241	5 in 1.6 mm) (41		2 in mm)	10.9 oz 309 g)	Limited Lifetime	C
11 (G G)	NSR-9924XL	Yes	Yes	Yes	150 / 20 / 400	00 / 18.75 / 7.25 / 7	115 n	1 11,	028	rproof N	ss-filled Rech lylon at blymer Lithiu	le (241	5 in 1.6 mm) (41		2 in mm)	9.9 oz (281 g)	Limited Lifetime	С
	NSR-9940XL	Yes	Yes	Yes	650 / 30 150 / 20 / 400	00 / 18.75 /	304 / 2 ⁻ 115 n	2 11,	142 / 302 / Wate 028	rproof Aircra Alu	aft-grade at Lithiu	le 9.5	5 in 1.6 mm) (41		2 in mm)	13.2 oz (374 g)	Limited Lifetime	С
1	NSR-9944XL	Yes	Yes	Yes	650 / 30 150 / 20 / 400	00 / 18.75 /	304 / 2 ⁻ 115 n	2 11,	142 / 302 / Wate 028	rproof Aircra Alu	aft-grade Rech minum Lithiu	le (241	5 in 1.6 mm) (41		2 in mm)	13.2 oz (374 g)	Limited Lifetime	С
													_		_			
Full-Size	Part Number	Dual- Light	Xtreme Lumens	Multi- Functio	650 / 3	(1118)	Distar	ce Ca	andela F		Material S	burce	ngth Head Diam	eter Dian	neter		Warranty	Certifi
(1)	NSR-9744XL	Yes	Yes	Yes	150 / 2	200 0 10.5 / 2			75 / 9,687 4,857 Wa		Uminum		00 1.6			17.5 oz (496 g)	Limited Lifetime	С
	NSR-9746XL	-	Yes	Yes	650 / ; / 10		450 / 2 70 n	25	i,253 / i,834 / 5,286	terproof Air	Crait-grade		8 in 25 m) 2.4 (61 n			22.5 oz (638 g)	Limited Lifetime	С
Traffic Wands		Part	Mul		Run-tim			Case	Powe		Length	Dia	ameter	Weig	ght	Warr	anty	Certific
Tame Wallus		P-1632	Funct Ye:		(hrs)	Ratir	roof Eng	ineered	Source 3 AA		16.5 in	1.	575 in	5.3	0Z	1 Ye	ear	CE
(m = 3)		P-1634	Yes		18 / 27		roof Eng	ineered	3 AA.		(419.1 mm)	1.	575 in	5.3	0Z	Limi	ear	CE
		P-1636	Yes		18 / 27		roof Eng	ineered	3 AA		(419.1 mm)	1.	575 in	5.3	0Z	Limi	ear	CE
	16M	.550	l re:		.0721	vvater p	-3. P	olymer	JAA		(419.1 mm)	(40) mm)	(151	g)	Limi	ted	OE
Headlamps	Part Number	Dual- Light	Multi- Functio	_{in} Lu	ımens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Materia		Width	Heigh	t Dept	h \	Neight	Warranty	Certifi
	NSP-4602B	Yes	Yes	30 /	15 / 35	15 / 36.5 / 12	19 m	92	Waterproof	Enginee Polyme		2.4 in (61 mm	1.9 in (48 mn			3.3 oz (94 g)	1 Year Limited	С
	NSP-4603B		Yes	12	20 / 70	5.5 / 14 1	144 / 100 m	5,324 / 2,498	Waterproof	Enginee Polyme		2.5 in (63.5 mr	2.2 in (56 mn			3.5 oz 100 g)	1 Year Limited	С
8	NSP-4604B	Yes	Yes	100	/ 45 / 90	7/8/8.5	93 m	2,169	Waterproof	Enginee Polyme		2.5 in (63.5 mr	2.2 in (56 mn			3.5 oz 101 g)	1 Year Limited	С
	NSP-4605B		Yes	15	50 / 80	4 / 7.5	175 / 126 m	7,960 / 4,081	Waterproo	Enginee Polyme		2.5 in (63.5 mr	2.2 in (56 mn			3.5 oz 100 g)	1 Year Limited	С
	NSP-4606B	Yes	Yes	140 /	50 / 150	3.5 / 8.5 / 4.25	116 m	3,442	Waterproof	Enginee Polyme		2.5 in (63.5 mr	2.2 in (56 mn			3.5 oz 100 g)	1 Year Limited	С
	NSP-4608B	Yes	Yes		/ 60 / 90 /) / 180	5 / 13.5 / 4.25 / 13.75 / 2.5	77 / 55 m	1,506 / 775	Waterproof	Enginee Polyme		2.6 in (66 mm	2.1 in (53 mn			3.3 oz (94 g)	Limited Lifetime	С
-	NSP-4608BC	Yes	Yes		/ 60 / 90 /) / 180	5 / 13.5 / 4.25 / 13.75 / 2.5	77 / 55 m	1,506 / 775	Waterproof	Enginee Polyme		2.6 in (66 mm	2.1 in (53 mn			3.4 oz (97 g)	Limited Lifetime	С
	NSP-4610B		Yes		/ 80 / 100 9 / 18	4/8/4/25/22.5	60 / 43 m	1,377 / 667	Waterproof	Enginee Polyme		2.5 in (64 mm	1.8 in) (46 mn			3.7 oz 104 g)	Limited Lifetime	С
Ā	NSP-4612B	Yes	Yes		90 / 20 /	18 / 13.5 / 75 / 37 / 3.5	140 m	4,820	Waterproof	Enginee Polyme		3.3 in (84 mm	3.3 in) (84 mn			9.5 oz 269 g)	Limited Lifetime	C
					50 / 75	3/6		4 245				3.6 in	1.6 in		+		Limited	
	NSP-4614B	Yes	Yes	150 /	75 / 300	3 / 6 1.5	76 / 55 m	1,315 684	Waterproof	Enginee Polyme		(90 mm				5.8 oz 164 g)	Lifetime	С
	NSP-4616B	Yes	Yes	250	0 / 125 0 / 125 / 0 / 250	6.5 / 10.5 6.5 / 10.5 3.5 / 6.5	78 / 71 m	1500 1250	Waterproof	Enginee Polyme		3.75 in (95 mm				9.3 oz 265 g)	Limited Lifetime	С
Multi-Purpose	Part	Dual-		Multi-	Lumei	ns Run-tim	e Beam	Candela	Water	Case	Power	Length	Head	Hand	dle	Weight	Warranty	Cortif
Multi-rui pose	Number NSP-1310RM	Light	Lumens F	Function Yes	5 / 15	(nrs)	Distance 5	e Candela	Rating Water Resistant	Material Engineered Polymer	Source 3 AAA	6.5 in (165mm)	1.375 in (35 mm)		eter	2.6 oz (74 g)	1 Year Limited	Certifi
#	NSP-1206R	Yes			9 / 16 /	17 5/7/4	15	53	Water	Engineered	2 AAA	4.4 in		1.1 x 0		1.8 oz	1 Year	C
		1	1 1		. 107	3,7,4			Resistant	Polymer		(112mm) 10.9 in		1.3 x 0	.9 in	(51 g) 8.2 oz	Limited 1 Year	
	NOT :			v	150 / 12	20 /	.,,		Water	Engineered	1	10,9111	1	. (22		(233 g)	Limited	С
	NSP-1260	Yes		Yes	150 / 12 60 / 2		/ 3		Resistant	Polymer	4 AA	(277 mm)		(33 x mm		0.0		
	NSP-1260 NSP-1400B	Yes		Yes		70 1074710		650			4 AA				.8 in	2.2 oz (62 g)	1 Year Limited	С
					60 / 2	/90 3/3/1.	5 50 m	650 650	Resistant	Polymer	2 AAA	(277 mm) 5.3 in		1.1 x 0	.8 in) mm)			
#	NSP-1400B	Yes		Yes	60 / 25	/90 3/3/1. /90 3/3/1.	5 50 m		Resistant Water Resistant Water	Polymer Engineered Polymer Engineered	2 AAA	5.3 in (135 mm))	1.1 x 0 (28 x 20	1.8 in () mm) () 8 in () mm)	(62 g) 2.2 oz	Limited 1 Year	С
#	NSP-1400B	Yes		Yes	60 / 25	70 (0/4/10 /90 3/3/1. /90 3/3/1.	5 50 m 5 50 m 5 50 m	650	Resistant Water Resistant Water Resistant Water	Engineered Polymer Engineered Polymer	2 AAA	5.3 in (135 mm) 5.3 in (135 mm) 5.3 in (135 mm)		1.1 x 0 (28 x 20 1.1 x 0 (28 x 20	1.8 in () mm) () 8 in () mm) () 8 in () mm)	2.2 oz (62 g) 2.2 oz	1 Year Limited	C
#	NSP-1400B NSP-1400R NSP-1400T	Yes Yes Yes		Yes Yes Yes	60 / 25 60 / 25 60 / 25	70 3/3/1. /90 3/3/1. /90 3/3/1. /90 3/3/1.	5 50 m 5 50 m 5 50 m	650	Resistant Water Resistant Water Resistant Water Resistant Water Resistant Water	Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer	2 AAA 2 AAA 2 AAA 2 AAA	5.3 in (135 mm) 5.3 in (135 mm) 5.3 in (135 mm) 5.3 in (135 mm)		1.1 x 0 (28 x 20)	1.8 in () mm) (1.8 in () mm) (1.8 in () mm) (1.8 in () mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g)	1 Year Limited 1 Year Limited 1 Year	C
#	NSP-1400B NSP-1400R NSP-1400T NSP-1402B	Yes Yes Yes		Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 130 / 1	70 1074710 /90 3/3/1. /90 3/3/1. /90 3/3/1. 5 3/2.8 0 3/5.5	5 50 m 5 50 m 5 50 m 5 50 m	650 650 650	Resistant Water Resistant Water Resistant Water Resistant Water Resistant Water Resistant	Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA	5.3 in (135 mm) 7 in	1.8 in	1.1 x 0 (28 x 20)	1.8 in () mm) () 8 in () mm) () 8 in () mm) () 8 in () mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 6.4 oz	Limited 1 Year	c c
#	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B	Yes Yes Yes Yes Yes Yes		Yes Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 60 / 1 130 / 1 / 236	70 10747 1	5 50 m 5 50 m 5 50 m 6 70 m	650 650 650 650 8,150	Resistant Water Resistant	Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer Engineerec Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3 AAA	5.3 in (135 mm) 7 in (178 mm)	1.8 in (46 mm)	1.1 x 0 (28 x 20 1.1 x	8 in 0 mm) 8 in mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 6.4 oz (181 g)	1 Year Limited	
**	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B	Yes Yes Yes Yes		Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 130 / 1 130 / 1 1236	70 10747 10 70 3/3/1. 790 3/3/1. 790 3/3/1. 5 3/2.8 0 3/5.5 110 9.5/10.5	5 50 m 5 50 m 5 50 m 6 70 m	650 650 650	Resistant Water Resistant	Polymer Engineered Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3 AAA 3 AA	5.3 in (135 mm) 7 in (178 mm) 7 in (178 mm)	1.8 in (46 mm)	1.1 x 0 (28 x 20 1.1 x	.8 in 0 mm) .8 in mm) .1 in mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 6.4 oz (181 g)	1 Year Limited	
#	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B	Yes Yes Yes Yes Yes Yes		Yes Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 130 / 1 / 238	70 10/4/10 /90 3/3/1. /90 3/3/1. /90 3/3/1. 5 3/2.8 0 3/5.5 100 9.5/10.5 70 3/25/10	5 50 m 5 50 m 5 50 m 6 181 m 7 6 181 m	650 650 650 650 8,150	Resistant Water Resistant	Polymer Engineered Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3 AAA 3 AA	5.3 in (135 mm) 7 in (178 mm) 7 in (178 mm)	1.8 in (46 mm)	1.1 x 0 (28 x 20 1.1 x	.8 in 0 mm) .1 in 1 in 5 mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 6.4 oz (181 g)	1 Year Limited	
**	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B NSP-2422B	Yes Yes Yes Yes Yes Yes		Yes Yes Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 60 / 1 130 / 1 / 236 200 / 1	70 1074710 70 1074710 70 3/3/1. 790 3/3/1. 5 3/2.8 0 3/5.5 110 9.5/10.5 70 3/2.5/1	5 50 m 5 50 m 5 50 m 6 181 m 7 6 181 m	650 650 650 650 8,150	Resistant Water Resistant	Polymer Engineerec Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3 AA 3 AA 3 AA 4 Rechargeable	5.3 in (135 mm) 7 in (178 mm) 7 in (178 mm) 11.5in (292 mm)	1.8 in (46 mm) 1.8 in (46 mm)	1.1 x 0 (28 x 20 1.1 x	8 in mm) 8.8 in mm) 8.8 in mm) 8.8 in mm) 8 in mm) 1 in mm) 1 in mm) 1 in mm) 3 in mm)	(62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 2.2 oz (62 g) 6.4 oz (181 g) 6.4 oz (181 g) 19.2 oz	1 Year Limited	
**	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B NSP-2422B NSP-2422R NSP-2422R	Yes Yes Yes Yes Yes Yes Yes Yes	Yes	Yes Yes Yes Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 130 / 1 / 238 200 / 1 / 326 250 / 1	70 10747 10 70 3/3/1. 790 3/3/1. 790 3/3/1. 5 3/2.8 0 3/5.5 10 9.5/10.5 10 9.5/10.5 70 3/2.5/1 40 9.5/9.5/	5 50 m 5 50 m 5 50 m 50 m 6 181 m 7 6 181 m 7 6 170 m	650 650 650 650 8,150 8,150	Resistant Water Resistant	Polymer Engineerec Polymer	2 AAA 2 AAA 2 AAA 2 AAA 2 AAA 3 AA 3 AA 3 AA 4 Rechargeable NiMH	5.3 in (135 mm) 7 in (178 mm)	1.8 in (46 mm) 1.8 in (46 mm) 2.1 in (53 mm) 1.6 in x 1.3 in (41 x 33	1.1 x 0 (28 x 20) 1.3 x 25 1.3	8 in 0 mm) 8 in 0 mm) 8 in 0 mm) 8 in 0 mm) 1 in 6 mm) 1 in 6 mm) 1 in mm) 1 in mm) 2 in mm)	(62 g) 2.2 oz (62 g) 6.4 oz (181 g) 6.4 oz (181 g) 19.2 oz (544g)	Limited 1 Year Limited Limited	
	NSP-1400B NSP-1400R NSP-1400T NSP-1402B NSP-1404B NSP-2422B NSP-2422R NSR-2422R	Yes Yes Yes Yes Yes Yes Yes Yes	Yes	Yes Yes Yes Yes Yes Yes Yes Yes	60 / 25 60 / 25 60 / 25 60 / 25 60 / 1 130 / 1 / 236 200 / 1 / 326 250 / 1 / 350	70 10747 10 70 3/3/1. 790 3/3/1. 790 3/3/1. 5 3/2.8 0 3/5.5 10 9.5/10.5 10 9.5/10.5 10 9.5/10.5 10 9.5/10.5 11 40 9.5/9.5 12 4.5/12.	5 50 m 5 50 m 5 50 m 6 181 m 7 6 181 m 7 5 213 m	650 650 650 650 8,150 8,150	Resistant Water Resistant	Polymer Engineered Polymer	2 AAA 2 AAA 2 AAA 2 AAA 3 AA 3 AA 3 AA 3 Rechargeable Lithium-ion 3 Rechargeable	5.3 in (135 mm) 7 in (178 mm) 7 in (178 mm) 7 in (178 mm) 7 in (178 mm) 11.5in (292 mm) 11.5in (187 mm) 14.6 in (371 mm)	1.8 in (46 mm) 1.8 in (46 mm) 1.6 in x 1.3 in (41 x 33 mm) 1.6 in x 1.3 in 1.	1.1 x 0 (28 x 20 1.1 x	8 in 0 mm) 1 in	(62 g) 2.2 oz (62 g) 6.4 oz (181 g) 19.2 oz (544g) 10.2 oz (187 g)	1 Year Limited 1 Year Limited	





Nightstick - Performance, Quality, and Value

Real-world Product Performance: Nightstick products are built not only with lumen ratings that exceed most competitor products, but also with optimized performance characteristics such as candela, beam distance and run-times. The design must take into consideration all of these factors to impact a light's efficiency and performance. Nightstick products are also designed and manufactured using the best quality housing materials, precision engineered reflectors, reliable real-world switch functionality, state-of-the-art electronics

and latest generation battery technology. Innovations such as Nightstick's exclusive Dual-Light™ design, combining a flashlight and a floodlight into a single light the ability to turn both on simultaneously for added versatility and safety, is altering the idea of what a flashlight is. Further evidence of this innovative

thinking is shown by our complete line of Intrinsically Safe lights that have the highest safety ratings in the world.



All products produced in Bayco Products' dedicated ISO 9001 Certified Factories undergo rigorous quality control inspections conducted by independent 3rd party inspectors at multiple points during the manufacturing process. Additional quality control inspections take place as products arrive and leave

TECHNOLOGY

Featuring **Dual-Light**

Bayco Products' distribution facility. Quality is also demonstrated in the customer service experience...with a target of nothing less than 100% customer satisfaction. Our quality is also backed by a Limited Lifetime Warranty.

Exceptional Value: Quite simply, the Nightstick product line is designed and manufactured to outperform and be of a higher quality standard than any other product in its class. Even with the highest quality standards, Nightstick products cost less as compared to competitor offerings. We remain committed to delivering the industry's best performing, highest-quality products at the lowest cost possible.